

# Glendale Lake, Turtle Cove 2 Shoreline Project

## Material Detail


- R-8 Sized Stone=432 tons
- R-6 Sized Stone= 150 tons
- R-4 Sized Stone= 410 tons
- 2RC Sized Stone= 98 tons
- 2A Limestone = 100 tons
- Rubber Mat 8'x50' = 4l
- Rebar - 2' = 200
- Geocell - 8" x = 8
- Geo Fabric Roll (16') = 1
- Geo Cell Caps = 200
- Rubber Matting Pins = 300
- Screened Topsoil = 80 yards

## Structure Detail

- 18 Rock Framed Deflectors
- 100' Geotextile Armoring
- 120 Rock Rubble humps- (R4)



## Plan View

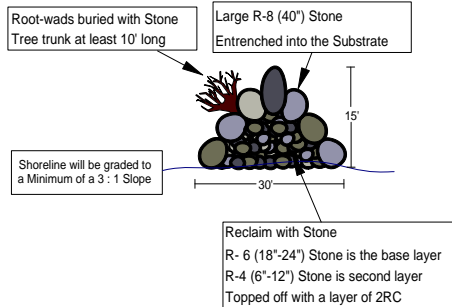

**Lake Habitat Improvement Plan  
for  
Glendale Lake, Cambria County  
by  
PA Fish and Boat Commission  
Division of Habitat Management**

Drawn By: Mike Swartz Habitat Manager: Mike Swartz Date 03/21/2016

NOT TO SCALE  
FIT IN FIELD  
ALL SIZES APPROXIMATE

**Note** • Blue Text Indicates Proposed Sites  
• Black Text Indicates Proposed Sites



## Section View

